

# nifty

## TM34T

### TRAILER MOUNTED WORK PLATFORM



**33ft 6in**

Platform height

**20ft**

Working outreach

**Telescopic Upper Boom**

Greater accuracy when  
positioning platform

**Bi-Energy Available**

Optimizing utilization

**Hydraulic Outriggers**

For quick & easy setup

**Fully Proportional  
Hydraulic Controls**

Simple, reliable &  
easy to maintain

**Telescopic Axles**

Access through double  
doorway openings



**niftylift.com**





# nifty<sup>TM</sup>34T

Designed specifically to give maximum performance from the most compact chassis possible, the Nifty **TM34T** utilizes its versatile telescopic boom to deliver unrivaled working outreach. Hydraulically operated outriggers make setting up quick and easy and the telescopic axles coupled with its compact base make this one of the most maneuverable trailer mounts available.

## SAFETY FEATURES

- Pressure Sensitive Outriggers
- Audible and Visible Alarms
- Manual Recovery with Hand Pump
- Dual Controls (Platform & Base)
- Lock Valves on all Hydraulic Cylinders
- Overrun Brakes with Gas Spring Hand Brake
- Dual Harness Points
- Meets OSHA and ANSI regulations



The **TM34T's** telescopic boom provides outstanding working outreach especially at lower levels where it's needed most.

The **TM34T** is also available on low pressure, rough terrain tracks (**TD34T**).




## SPECIFICATIONS

<b>Working Height</b>	40ft
<b>Platform Height</b>	33ft 6in
<b>Working Outreach</b>	20ft
<b>Slew</b>	360°
<b>Width - Travelling</b>	4ft 11in
<b>- Working</b>	11ft 8in
<b>- Axles Retracted*</b>	3ft 7in
<b>Height</b>	6ft 3in
<b>Length</b>	14ft 9in
<b>Weight</b>	3,100lbs**
<b>Platform Capacity</b>	500lbs
<b>Platform Size</b>	3ft 7in x 2ft 2in
<b>Control System</b>	Fully Proportional Hydraulic
<b>Power System</b>	Mains Only Battery Only Gas or Diesel Only Bi-Energy (Engine & Battery)
<b>Drive Options</b>	Traction Drive

\* Traction drive axles do not retract.

\*\* Weights may vary according to specification / power options, please confirm before ordering.

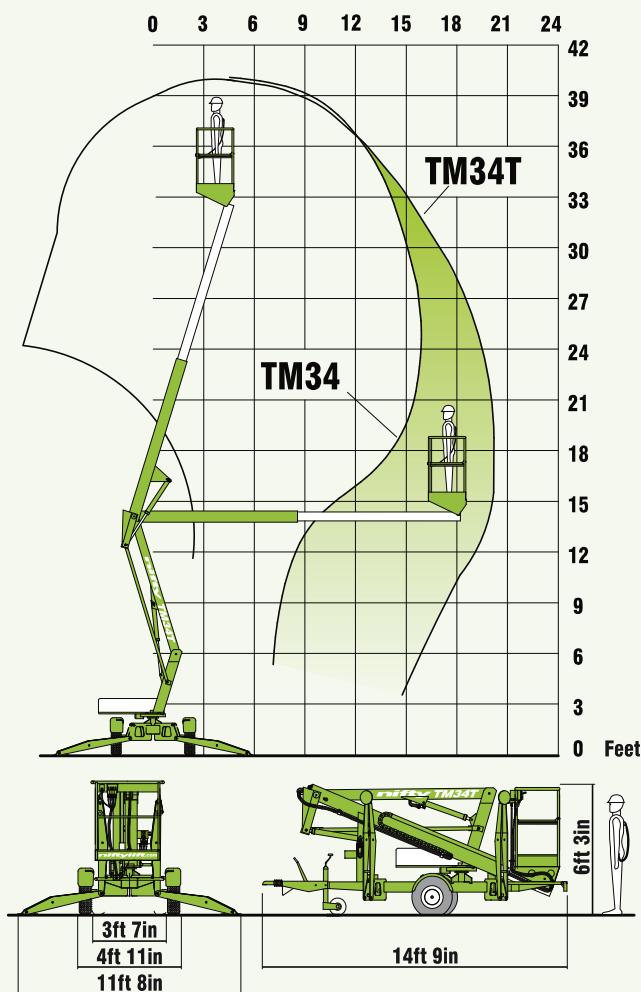

Due to a policy of continuing development and improvement, Niftylift reserves the right to change any specification without notice. Please confirm exact specification before ordering.

### Supplied by:

#### NIFTYLIFT INC

32 Concourse Way,  
Greer, SC 29650 USA  
Sales: 1-800-NIFTYLIFT (800-643-8954)  
Office: 1-877-MYNIFTY (877-696-4389)  
Fax: 1-864-968-8836  
e.mail: [info@niftylift.com](mailto:info@niftylift.com)  
[www.niftylift.com](http://www.niftylift.com)

#### NIFTYLIFT LTD

Fingle Drive, Stonebridge  
Milton Keynes, MK13 0ER  
England, United Kingdom  
Tel.: +44 (0)1908 223456  
Fax.: +44 (0)1908 312733  
e.mail: [info@niftylift.com](mailto:info@niftylift.com)  
[www.niftylift.com](http://www.niftylift.com)